



Oticon Own SI 1 | 2 | 3 | 4 IIC / CIC

Oticon Own™ SI IIC and CIC are our smallest in-the-ear styles. The hearing aids are built on the Sirius™ platform and powered by Oticon BrainHearing™ technology. IIC and CIC are discreet hearing aids with the IIC being invisible in most ears. Both styles use disposable batteries.



Technical Features

- › Hydrophobic coating
- › NFMI (Near-Field Magnetic Induction)¹
- › Push-button¹
- › Battery size: 10

Operating conditions

Temperature: +1°C to +40°C (34°F to 104°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

Transportation and storage conditions

Temperature and humidity shall not exceed the mentioned limits for extended periods during transportation and storage.

Transportation

Temperature: -25°C to +60°C (-13°F to 140°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

Storage


Temperature: -25°C to +60°C (-13°F to 140°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

¹) Optional for CIC only


WARNING: No modification of this equipment is allowed.

Fitting ranges



Oticon Own SI 1

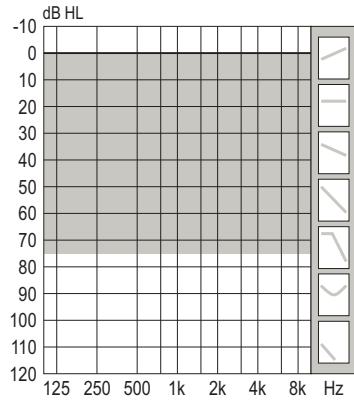

Oticon Own SI 2 | 3 | 4

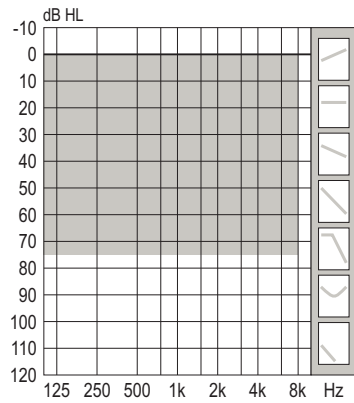

75

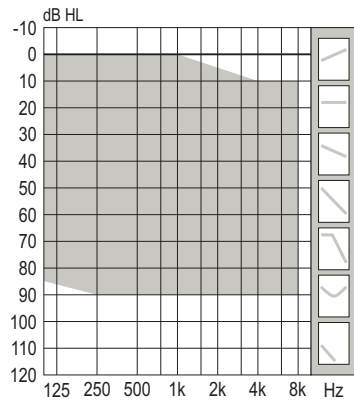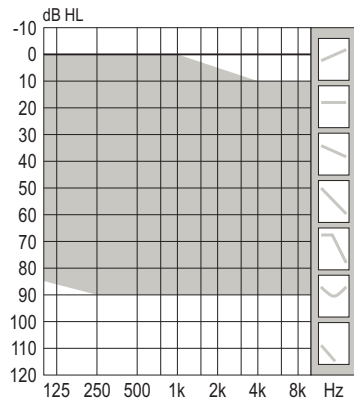

90

Feature overview

	Own SI 1	Own SI 2	Own SI 3	Own SI 4
Speech understanding & listening ease				
MoreSound Intelligence™ 3.0	Level 1	Level 2	Level 3	Level 4
Environment classifier	5 configurations	5 configurations	3 configurations	Not adjustable
Neural Noise Suppression, Difficult / Easy	12 dB / 6 dB	10 dB / 4 dB	8 dB / 2 dB	6 dB / 0 dB
Sound Enhancer	3 configurations	2 configurations	1 configuration	1 configuration
MoreSound Amplifier™ 3.0	•	•	•	•
SuddenSound Stabilizer	6 configurations	5 configurations	4 configurations	2 configurations
MoreSound Optimizer™	•	•	•	•
Feedback shield	•	•	•	•
Spatial Sound™ ¹	○	○	○	–
Soft Speech Booster	•	•	•	•
Frequency lowering, Speech Rescue™	•	•	•	•
Sound quality				
Clear Dynamics	•	•	–	–
Better-Ear Priority ¹	○	○	○	–
Fitting Bandwidth ²	10 kHz	8 kHz	8 kHz	8 kHz
Processing Channels	64	48	48	48
Personalisation & optimised fitting				
Fitting Bands	24	20	18	14
Adaptation Management	•	•	•	•
Fitting Formulas	VAC+, NAL-NL1/ NAL-NL2, DSL v5	VAC+, NAL-NL1/ NAL-NL2, DSL v5	VAC+, NAL-NL1/ NAL-NL2, DSL v5	VAC+, NAL-NL1/ NAL-NL2, DSL v5
Audible Contrast Threshold (ACT™) prescription	•	•	•	•
Tinnitus SoundSupport™ ³	○	○	○	○

1) Requires NFMI

2) Bandwidth accessible for gain adjustments during fitting

3) Requires NFMI and push-button

• Default

○ Optional features only available for CIC

– Not included



Oticon Own SI 1 IIC

Ear Simulator

Measured according to IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015, IEC 60118-1:1995+AMD1:1998 CSV and IEC 60318-4:2010



Technical information
Omnidirectional mode is used unless otherwise stated.

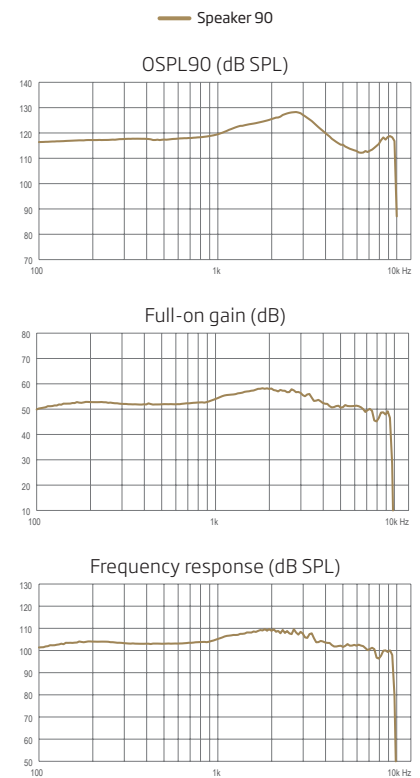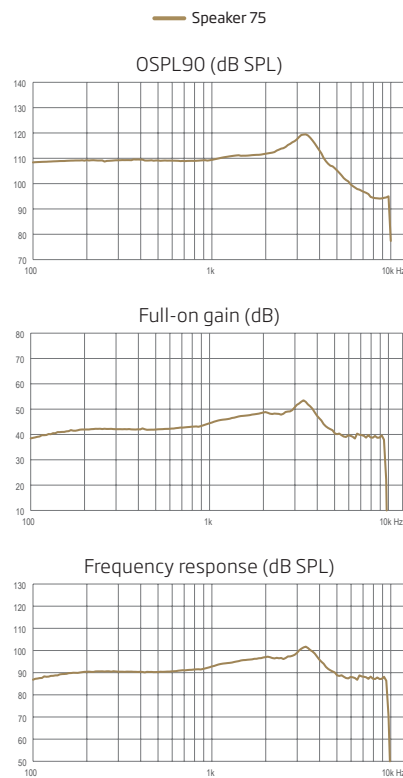

OSPL90, Peak (dB SPL)	119	128
OSPL90, 1600 Hz (dB SPL)	111	124
OSPL90, HFA (dB SPL)	111	124
Full-on gain, Peak (dB) ¹	53	58
Full-on gain, 1600 Hz (dB) ¹	47	57
Full-on gain, HFA (dB) ¹	47	56
Reference test gain (dB)	36	49
Frequency range (Hz)	<100-9500	<100-9500
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<3	<3
Total harmonic distortion (Input 70 dB SPL), 1600 Hz (%)	<3	<2
Equivalent input noise level, Omni (dB SPL)	19	17
Battery consumption, Typical (mA) ²	1.8	1.9
Battery consumption, Quiescent (mA) ²	1.7	1.8
Battery life, artificial measurement, hours ³	55	50
Expected battery life, hours (battery size 10 - IEC PR70) ⁴	45-55	40-55

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.

3) Based on the standardised battery consumption measurement (e.g. IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels.



Oticon Own SI 1 IIC

2CC Coupler

Measured according to ANSI S3.22-2014, IEC 60118-0:2015 and IEC 60318-5:2006



Technical information
Omnidirectional mode is used unless otherwise stated.

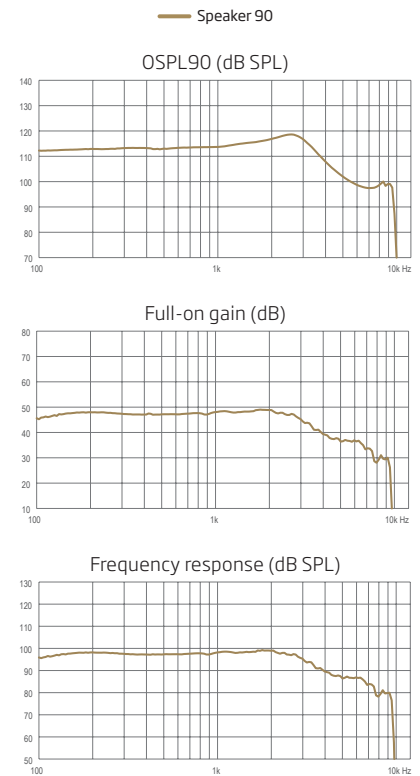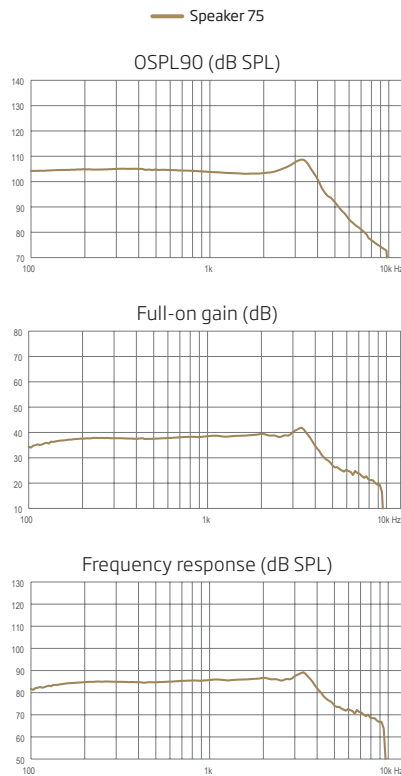

OSPL90, Peak (dB SPL)	109	119
OSPL90, 1600 Hz (dB SPL)	103	116
OSPL90, HFA (dB SPL)	104	116
Full-on gain, Peak (dB) ¹	42	49
Full-on gain, 1600 Hz (dB) ¹	39	48
Full-on gain, HFA (dB) ¹	38	48
Reference test gain (dB)	26	38
Frequency range (Hz)	<100-8300	<100-7700
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2
Total harmonic distortion (Input 65 dB SPL), 1600 Hz (%)	<2	<2
Equivalent input noise level, Omni (dB SPL)	20	20
Battery consumption, Typical (mA) ²	1.8	2.4
Battery consumption, Quiescent (mA) ²	1.7	1.8
Battery life, artificial measurement, hours ³	55	40
Expected battery life, hours (battery size 10 - IEC PR70) ⁴	45-55	40-55

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.



3) Based on the standardised battery consumption measurement (e.g. IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels.

Measured according to IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015, IEC 60118-1:1995+AMD1:1998 CSV and IEC 60318-4:2010



Technical information
Omnidirectional mode is used unless otherwise stated.

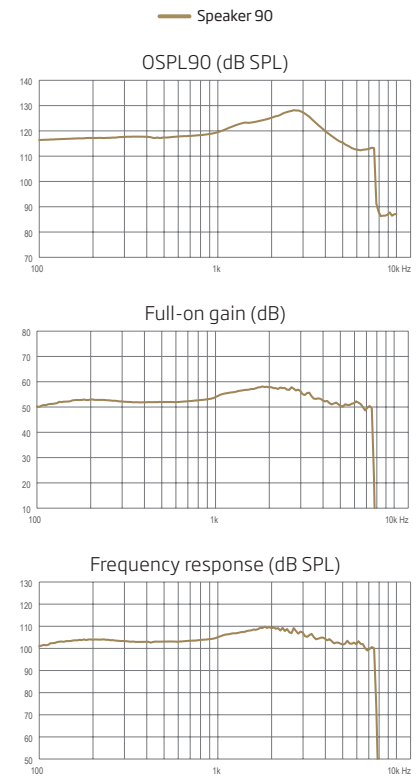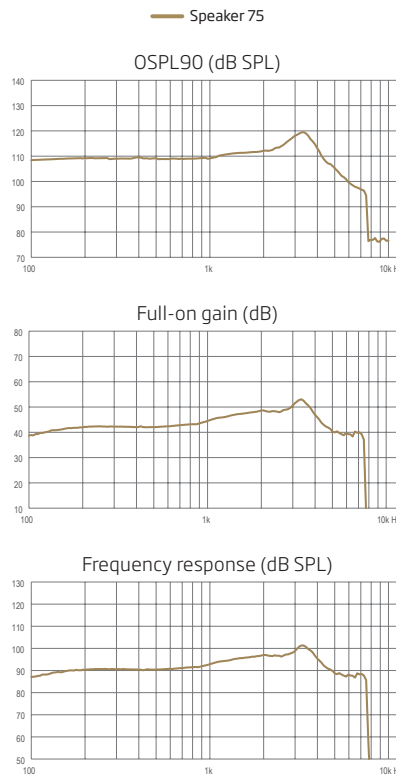

OSPL90, Peak (dB SPL)	119	128
OSPL90, 1600 Hz (dB SPL)	111	123
OSPL90, HFA (dB SPL)	111	124
Full-on gain, Peak (dB) ¹	53	58
Full-on gain, 1600 Hz (dB) ¹	47	57
Full-on gain, HFA (dB) ¹	47	56
Reference test gain (dB)	36	49
Frequency range (Hz)	<100-7500	<100-7500
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<3	<3
Total harmonic distortion (Input 70 dB SPL), 1600 Hz (%)	<3	<2
Equivalent input noise level, Omni (dB SPL)	19	17
Battery consumption, Typical (mA) ²	1.8	1.9
Battery consumption, Quiescent (mA) ²	1.7	1.8
Battery life, artificial measurement, hours ³	55	50
Expected battery life, hours (battery size 10 - IEC PR70) ⁴	45-55	40-55

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.



3) Based on the standardised battery consumption measurement (e.g. IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels.

Measured according to ANSI S3.22-2014, IEC 60118-0:2015 and IEC 60318-5:2006



Technical information
Omnidirectional mode is used unless otherwise stated.

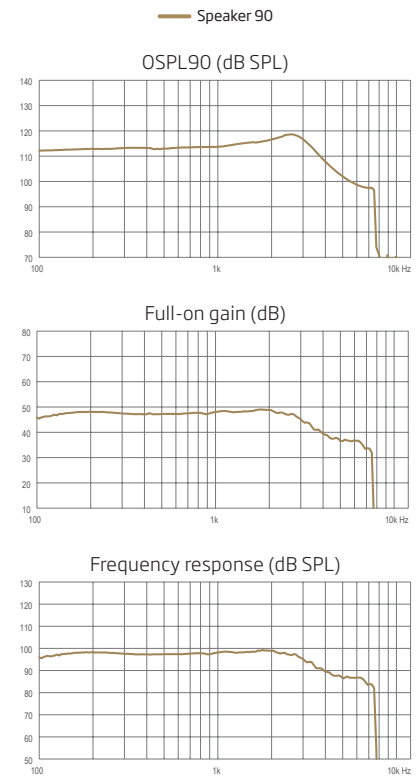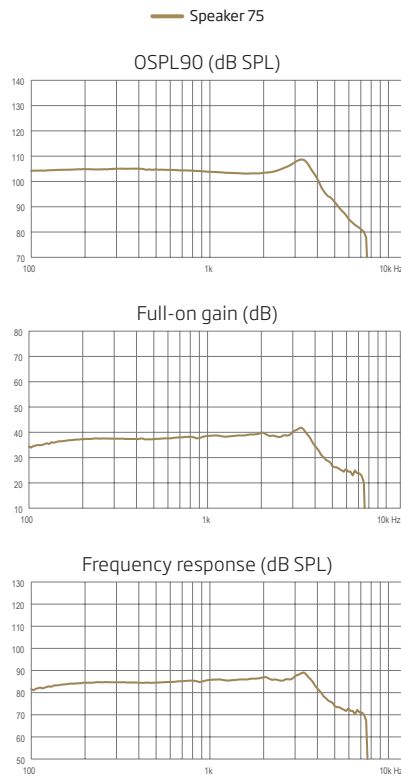

OSPL90, Peak (dB SPL)	109	119
OSPL90, 1600 Hz (dB SPL)	103	116
OSPL90, HFA (dB SPL)	104	116
Full-on gain, Peak (dB) ¹	42	49
Full-on gain, 1600 Hz (dB) ¹	39	48
Full-on gain, HFA (dB) ¹	38	48
Reference test gain (dB)	26	38
Frequency range (Hz)	<100-7500	<100-7500
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2
Total harmonic distortion (Input 65 dB SPL), 1600 Hz (%)	<2	<2
Equivalent input noise level, Omni (dB SPL)	20	20
Battery consumption, Typical (mA) ²	1.8	2.4
Battery consumption, Quiescent (mA) ²	1.7	1.8
Battery life, artificial measurement, hours ³	55	40
Expected battery life, hours (battery size 10 - IEC PR70) ⁴	45-55	40-55

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.



3) Based on the standardised battery consumption measurement (e.g. IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels.

Measured according to IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015, IEC 60118-1:1995+AMD1:1998 CSV and IEC 60318-4:2010



Technical information
Omnidirectional mode is used unless otherwise stated.

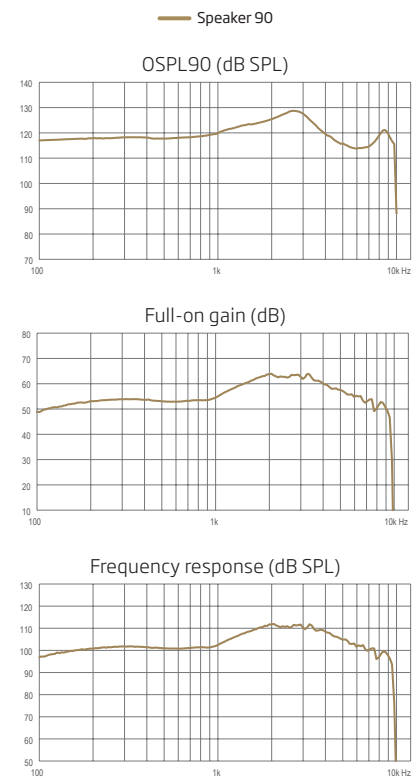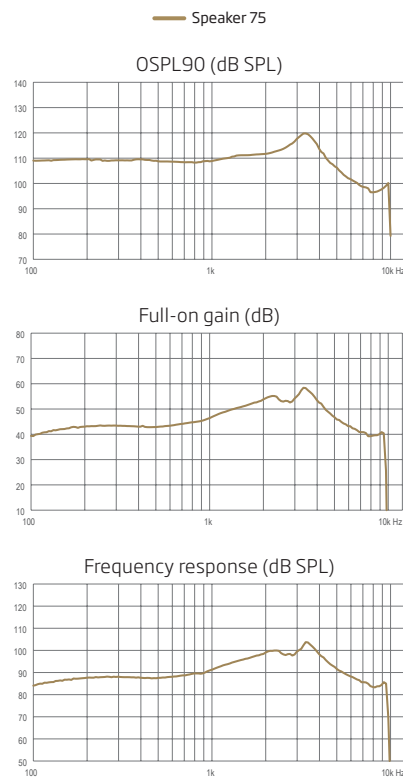

OSPL90, Peak (dB SPL)	120	129
OSPL90, 1600 Hz (dB SPL)	111	124
OSPL90, HFA (dB SPL)	111	124
Full-on gain, Peak (dB) ¹	58	64
Full-on gain, 1600 Hz (dB) ¹	51	61
Full-on gain, HFA (dB) ¹	50	59
Reference test gain (dB)	36	49
Frequency range (Hz)	<100-9500	<100-9500
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 1600 Hz (%)	<3	<2
Equivalent input noise level, Omni (dB SPL)	19	17
Battery consumption, Typical (mA) ²	1.6	1.8
Battery consumption, Quiescent (mA) ²	1.6	1.6
Battery life, artificial measurement, hours ³	65	55
Expected battery life, hours (battery size 10 - IEC PR70) ⁴	50-55	30-55

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.

3) Based on the standardised battery consumption measurement (e.g. IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels.



Oticon Own SI 1 CIC

2CC Coupler

Measured according to ANSI S3.22-2014, IEC 60118-0:2015 and IEC 60318-5:2006



Technical information
Omnidirectional mode is used unless otherwise stated.

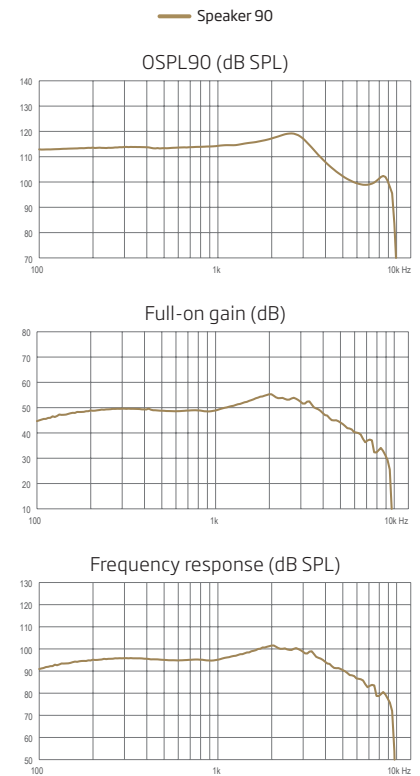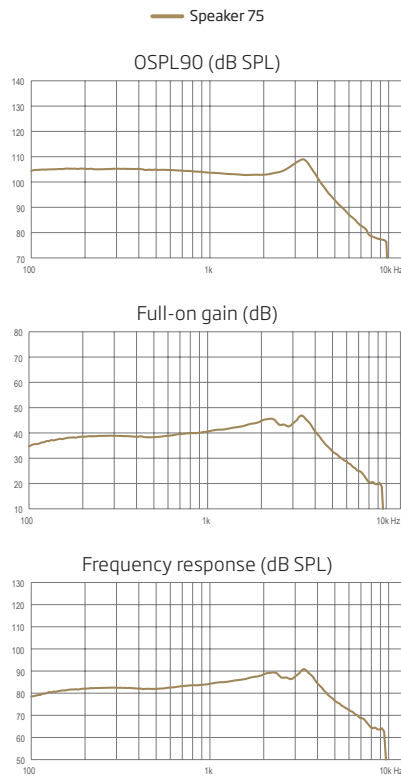

OSPL90, Peak (dB SPL)	109	119
OSPL90, 1600 Hz (dB SPL)	103	116
OSPL90, HFA (dB SPL)	104	116
Full-on gain, Peak (dB) ¹	47	55
Full-on gain, 1600 Hz (dB) ¹	43	53
Full-on gain, HFA (dB) ¹	42	52
Reference test gain (dB)	26	38
Frequency range (Hz)	<100-6900	<100-7500
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2
Total harmonic distortion (Input 65 dB SPL), 1600 Hz (%)	<2	<2
Equivalent input noise level, Omni (dB SPL)	19	19
Battery consumption, Typical (mA) ²	1.7	1.9
Battery consumption, Quiescent (mA) ²	1.6	1.6
Battery life, artificial measurement, hours ³	60	50
Expected battery life, hours (battery size 10 - IEC PR70) ⁴	50-55	30-55

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.



3) Based on the standardised battery consumption measurement (e.g. IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels.

Measured according to IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015, IEC 60118-1:1995+AMD1:1998 CSV and IEC 60318-4:2010



Technical information
Omnidirectional mode is used unless otherwise stated.

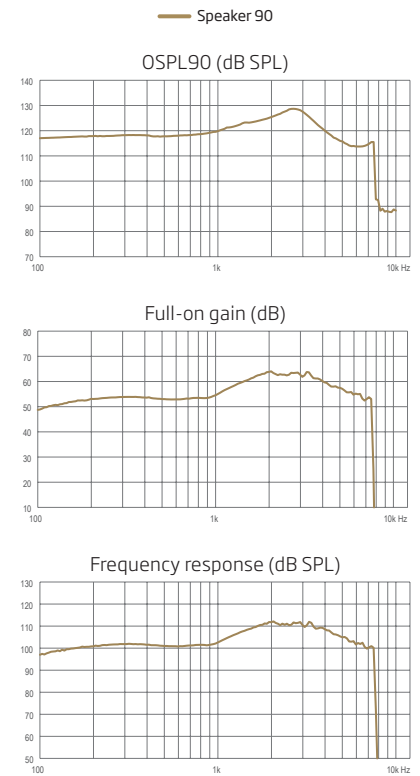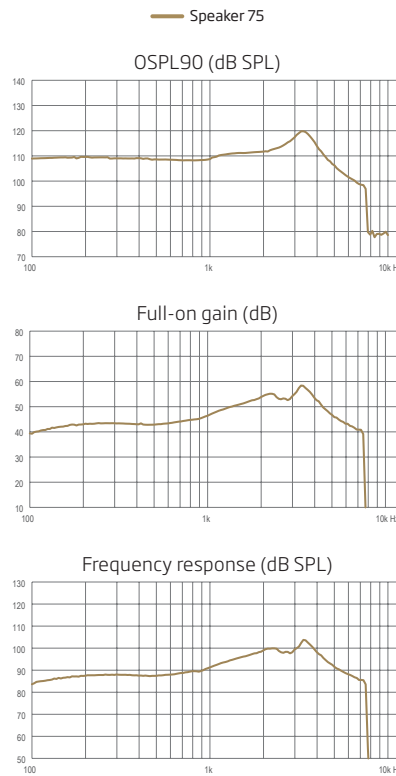

OSPL90, Peak (dB SPL)	120	129
OSPL90, 1600 Hz (dB SPL)	111	123
OSPL90, HFA (dB SPL)	111	124
Full-on gain, Peak (dB) ¹	58	64
Full-on gain, 1600 Hz (dB) ¹	51	61
Full-on gain, HFA (dB) ¹	50	59
Reference test gain (dB)	36	49
Frequency range (Hz)	<100-7500	<100-7500
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 1600 Hz (%)	<3	<2
Equivalent input noise level, Omni (dB SPL)	19	17
Battery consumption, Typical (mA) ²	1.6	1.8
Battery consumption, Quiescent (mA) ²	1.6	1.6
Battery life, artificial measurement, hours ³	65	55
Expected battery life, hours (battery size 10 - IEC PR70) ⁴	50-55	30-55

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.



3) Based on the standardised battery consumption measurement (e.g. IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels.

Measured according to ANSI S3.22-2014, IEC 60118-0:2015 and IEC 60318-5:2006



Technical information
Omnidirectional mode is used unless otherwise stated.

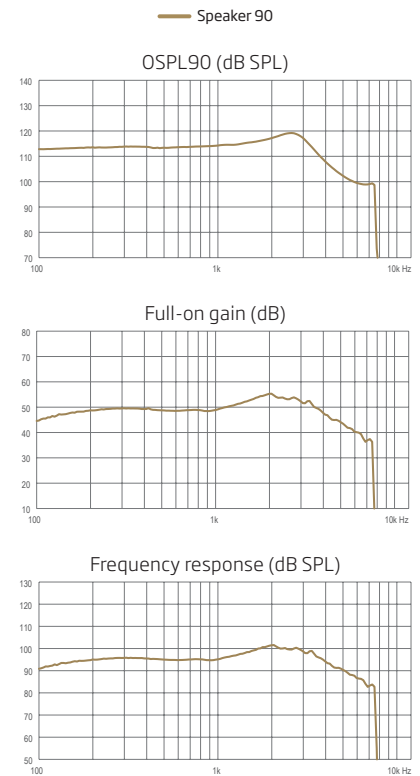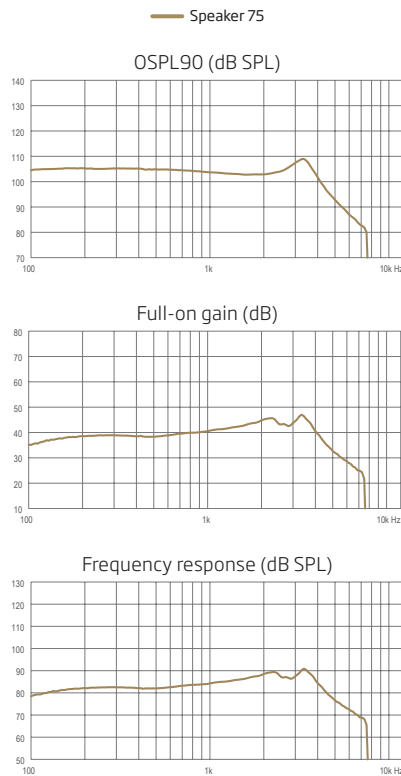


OSPL90, Peak (dB SPL)	109	119
OSPL90, 1600 Hz (dB SPL)	103	116
OSPL90, HFA (dB SPL)	104	116
Full-on gain, Peak (dB) ¹	47	55
Full-on gain, 1600 Hz (dB) ¹	43	53
Full-on gain, HFA (dB) ¹	42	52
Reference test gain (dB)	26	38
Frequency range (Hz)	<100-6900	<100-7500
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2
Total harmonic distortion (Input 65 dB SPL), 1600 Hz (%)	<2	<2
Equivalent input noise level, Omni (dB SPL)	19	19
Battery consumption, Typical (mA) ²	1.7	1.9
Battery consumption, Quiescent (mA) ²	1.6	1.6
Battery life, artificial measurement, hours ³	60	50
Expected battery life, hours (battery size 10 - IEC PR70) ⁴	50-55	30-55

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Battery current is measured according to IEC 60118-0:1983/AMD1:1994 §7.11, IEC 60118-0:2015 §7.7 and ANSI S3.22:2014 §6.13 after a settling time of minimum 3 minutes.

3) Based on the standardised battery consumption measurement (e.g. IEC 60118-0:1983/AMD1:1994). The actual battery life depends on battery quality, use pattern, active feature set, hearing loss and sound environment.

4) Real usage battery life is shown as an estimated interval based on mixed use cases with variable amplification settings and variable input levels.

 SBO Hearing A/S
Kongebakken 9
DK-2765 Smørum
Denmark

Headquarters
Oticon A/S
Kongebakken 9
DK-2765 Smørum
Denmark

275845UK / 2024.05.30 / v1